



**120-347V**  
Multi-Volt

# 2x2 LED Flat Panel Light

## Don't worry its Multi-volt!



**DIAGRAM**

### FEATURES

- 2x2' ft 40W 4400lm**  
**110lm/W Lumens Efficacy**  
**DLC 4.2, cUL listed**
- Dimmable (0-10V)
  - L70 minimum 50,000 hour life
  - Replaces 3 x F17T8 Fixture
  - No ballast required
  - Polystyrene frosted diffuser with PMMA inside light guide plate
  - Aluminum housing AL6063-T6
  - Suitable for damp locations
  - No flicker, mercury free, instant on
  - 5-year warranty

### APPLICATION



- Offices
- Retail
- Museum
- Hospitality
- Commercial
- Lighting showroom

### INSTALLATION

- Recessed
- Suspending
- Wall/Ceiling mount

### ADDITIONAL INFO

- White Trim
- Operating Temperature -20°C ~+50°C

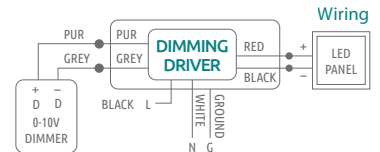

ORDER CODE	DESCRIPTION	WATTS	VOLT	LUMENS	CCT(K)	LIFE HRS	BEAM ANGLE	CRI	IP	PF	MOL (IN)	CASE QTY.
L2812-2342	LED FLAT PANEL 2x2' MULTI-VOLT 40W 4000K WH	40	120-347V	4400	4000K	50,000	180°	80+	20	0.9	L23.7xW23.7xH1.8	2
L2812-2542	LED FLAT PANEL 2x2' MULTI-VOLT 40W 5000K WH	40	120-347V	4400	5000K	50,000	180°	80+	20	0.9	L23.7xW23.7xH1.8	2
<b>Optional Accessories</b>												
L2850-0002	LFP SUSPENSION CABLES/ KITx2											
L2852-0002	LFP 2'x2' SURFACE MOUNT FRAME											

Distributed by



**Toronto | Calgary | Halifax**  
Tel: 1-905-264-1125 Toll Free: 1-800-361-7820 Fax: 1-905-264-1175  
Email: [information@interadwes.com](mailto:information@interadwes.com) | Website: [www.interadwes.com](http://www.interadwes.com)  
Head Office: 1-180 New Huntington Road, Vaughan, ON L4H 0P5