



120-347V

Multi-Volt

2x2 LED Flat Panel Light

Don't worry its Multi-volt!



High CRI



Dimmable



DIAGRAM

FEATURES

2x2' ft 40W 4400lm

110lm/W Lumens Efficacy

DLC 4.2, cULus listed

- Dimmable (0-10V)
- L70 minimum 50,000 hour life
- Replaces 3 x F17T8 Fixture
- No ballast required
- Glare-free polycarbonate diffused lens
- Suitable for damp locations
- Aluminum housing with PMMA lampshade
- No flicker, mercury free, instant on
- 5-year warranty

APPLICATION



- Offices
- Retail
- Museum
- Hospitality
- Commercial
- Lighting showroom

INSTALLATION

- Recessed
- Suspending
- Wall/Ceiling mount

ADDITIONAL INFO

- White Trim
- Operating Temperature -20°C ~+50°C

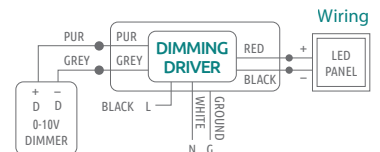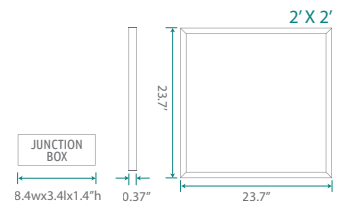

ORDER CODE	DESCRIPTION	WATTS	VOLT	LUMENS	CCT(K)	LIFE HRS	BEAM ANGLE	CRI	IP	PF	MOL (IN)	CASE QTY.
L2812-2342	LED FLAT PANEL 2x2' MULTI-VOLT 40W 4000K WH	40	120-347V	4400	4000K	50,000	180°	80+	20	0.9	L23.7xW23.7xH1.8	2
L2812-2542	LED FLAT PANEL 2x2' MULTI-VOLT 40W 5000K WH	40	120-347V	4400	5000K	50,000	180°	80+	20	0.9	L23.7xW23.7xH1.8	2
Optional Accessories												
L2850-0002	LFP SUSPENSION CABLES/ KITx2											
L2852-0002	LFP 2'x2' SURFACE MOUNT FRAME											

Distributed by



Toronto | Calgary | Halifax

Tel: 1-905-264-1125 Toll Free: 1-800-361-7820 Fax: 1-905-264-1175

Email: information@interadwes.com | Website: www.interadwes.com

Head Office: 1-180 New Huntington Road, Vaughan, ON L4H 0P5