



2x2 LED Flat Panel Light

Even light at any height!





High CRI



Dimmable



DIAGRAM

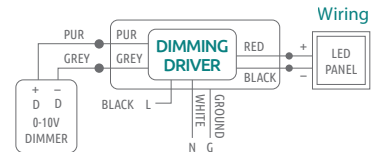

FEATURES

2'x2' ft 40W 4800lm
120lm/W Lumens Efficacy
DLC 4.2, eTLus listed

- Dimmable
- 50,000 hour life
- Replaces 3 x F17T8 Fixture
- No ballast required
- Dimmable (0-10V)
- Glare-free polycarbonate diffused lens
- Suitable for damp locations
- Aluminum housing with PMMA lampshade
- No flicker, mercury free, instant on
- 5-year warranty

APPLICATION

- Offices
- Retail
- Museum
- Hospitality
- Commercial
- Lighting showroom

INSTALLATION

- Recessed
- Suspending
- Wall/Ceiling mount

ADDITIONAL INFO

- White Trim
- Operating Temperature -20°C ~+50°C

ORDER CODE	DLC REFERENCE	DESCRIPTION	WATTS	VOLT	LUMENS	CCT(K)	LIFE HRS	BEAM ANGLE	CRI	IP	PF	WT. (LB/PC)	MOL (MM)	CASE QTY.
L2922-402G	ET-22-40WD-100-40-2835	LED PANEL 2x2' 120v 40W 4K WH	40	100-277 V	4800	4000K	50,000	180°	80+	44	0.95	8.37	596wX596h	4
L2922-403G	ET-22-40WD-100-50-2835	LED PANEL 2x2' 120v 40W 5K WH	40	100-277 V	4800	5000K	50,000	180°	80+	44	0.95	8.37	596wX596h	4
Optional Accessories														
L2950-X10	-	LED Panel Suspension Kit Type #1												

Also available in 5500K and 6500K Non-DLC

Distributed by



Toronto | Calgary | Halifax

Tel: 1-905-264-1125 Toll Free: 1-800-361-7820 Fax: 1-905-264-1175

Email: information@interadwes.com | Website: www.interadwes.com

Head Office: 1-180 New Huntington Road, Vaughan, ON L4H 0P5