

# ILLUMINEX

120-347V  
Multi-Volt

## 2x4 LED Flat Panel Light

### Don't worry its Multi-volt!



### FEATURES

**2x4' ft 50W 5500lm**  
**110lm/W Lumens Efficacy**  
**DLC 4.2, cULus listed**

- Dimmable (0-10V)
- L70 minimum 50,000 hour life
- Replaces 2 x F32T8 Fixture
- No ballast required
- Glare-free polycarbonate diffused lens
- Suitable for damp locations
- Aluminum housing with PMMA lampshade
- No flicker, mercury free, instant on
- 5-year warranty

### APPLICATION

- Offices
- Retail
- Museum
- Hospitality
- Commercial
- Lighting showroom


### INSTALLATION

- Recessed
- Suspending
- Wall/Ceiling mount

### ADDITIONAL INFO

- White Trim
- Operating Temperature -20°C ~+50°C

### DIAGRAM

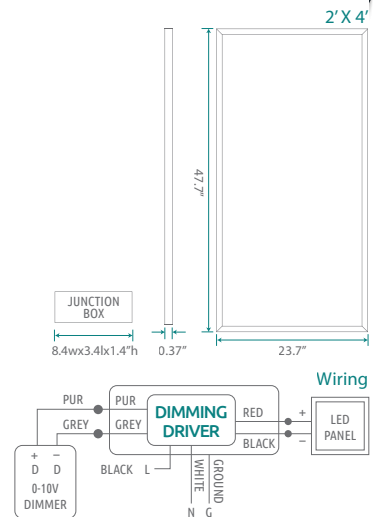

ORDER CODE	DESCRIPTION	WATTS	VOLT	LUMENS	CCT(K)	LIFE HRS	BEAM ANGLE	CRI	IP	PF	MOL (IN)	CASE QTY.
L2813-3342	LED FLAT PANEL 2x4' MULTI-VOLT 50W 4000K WH	50	120-347V	5500	4000K	50,000	180°	80+	20	0.9	L47.7xW23.7xH1.8	2
L2813-3542	LED FLAT PANEL 2x4' MULTI-VOLT 50W 5000K WH	50	120-347V	5500	5000K	50,000	180°	80+	20	0.9	L47.7xW23.7xH1.8	2
<b>Optional Accessories</b>												
L2850-0003	LFP SUSPENSION CABLES/ KITx3											
L2853-0002	LFP 2'x4' SURFACE MOUNT FRAME											

Distributed by



Toronto | Calgary | Halifax

Tel: 1-905-264-1125 Toll Free: 1-800-361-7820 Fax: 1-905-264-1175  
Email: information@interadwes.com | Website: www.interadwes.com  
Head Office: 1-180 New Huntington Road, Vaughan, ON L4H 0P5