



# 3" Slim Panel Downlight

The first slim panel with a 1/4" recess!



## FEATURES

- 3" 5W 400lm**  
**Type IC rated** (direct contact with insulation)  
**Energy Star, cETLus listed**
- Dimmable
  - 50,000 hour life
  - 5W replaces 40W halogen
  - Air-tight aluminum housing with PMMA lampshade in white finish
  - Glare-free polycarbonate diffused lens
  - Suitable for damp locations
  - Quick & easy installation
  - No flicker, mercury free, instant on
  - 5-year warranty

## APPLICATION



- Offices
- Retail
- Museum
- Hospitality
- Commercial
- Lighting showroom

## INSTALLATION

- Recessed
- Insulated/drop ceilings
- Fits under studs and in narrow plenums

## ADDITIONAL INFO

- White/Black/Silver Avai.
- Operating Temperature -25°C ~+40°C

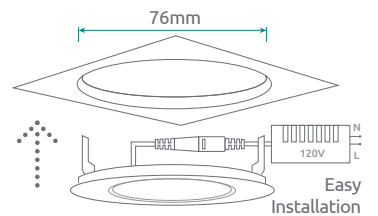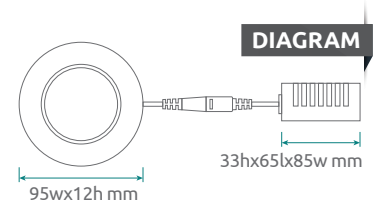

ORDER CODE	DESCRIPTION	WATTS	VOLT	LUMENS	CCT(K)	LIFE HRS	BEAM ANGLE	CRI	IP	POWER FACTOR	MOL (MM)	MOUNT SIZE	CASE QTY.
L3503-061E	ILLX SLMP 3"R 5W 3K 400L WH cT	5	120 V	400	3000	50,000	180°	80+	44	0.95-0.98	95	76	40
L3503-062E	ILLX SLMP 3"R 5W 4K 400L WH cT	5	120 V	400	4000	50,000	180°	80+	44	0.95-0.98	95	76	40
L3503-063E	ILLX SLMP 3"R 5W 5K 400L WH cT	5	120 V	400	5000	50,000	180°	80+	44	0.95-0.98	95	76	40

Also available in 6000K Non-Energy Star

Distributed by



**Toronto | Calgary | Halifax**  
 Tel: 1-905-264-1125 Toll Free: 1-800-361-7820 Fax: 1-905-264-1175  
 Email: [information@interadwes.com](mailto:information@interadwes.com) | Website: [www.interadwes.com](http://www.interadwes.com)  
 Head Office: 1-180 New Huntington Road, Vaughan, ON L4H 0P5