

ILLUMINEX

8" Slim Panel Downlight

The first slim panel with a 1/4" recess!



FEATURES

- 8" 18W 1980lm**
Type IC rated (direct contact with insulation)
Energy Star, cETLus listed
- Dimmable
 - 50,000 hour life
 - 18W replaces 165W halogen
 - Air-tight aluminum housing with PMMA lampshade in white finish
 - Glare-free polycarbonate diffused lens
 - Suitable for damp locations
 - Quick & easy installation
 - No flicker, mercury free, instant on
 - 5-year warranty

APPLICATION



- Offices
- Retail
- Museum
- Hospitality
- Commercial
- Lighting showroom

INSTALLATION

- Recessed
- Insulated/drop ceilings
- Fits under studs and in narrow plenums

ADDITIONAL INFO

- White/Nickle Trim Avail.
- Operating Temperature -25°C ~+40°C

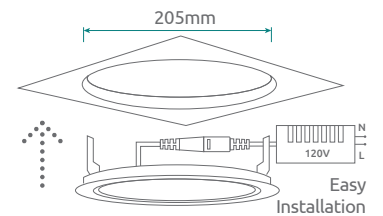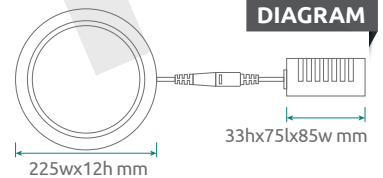

ORDER CODE	ENERGY STAR LISTING CODE	DESCRIPTION	WATTS	VOLT	LUMENS	CCT(K)	LIFE HRS	BEAM ANGLE	CRI	IP	PF	MOL (MM)	MOUNT SIZE	CASE QTY.
L3508-181R	YG-YGCL-18X-ETL(3000K)	ILLX SLMP 8"R 18W 3K 1980L WH	18	120 V	1980	3000	50,000	180°	80+	44	0.98	225	205	10
L3508-182R	YG-YGCL-18X-ETL(4000K)	ILLX SLMP 8"R 18W 4K 1980L WH	18	120 V	1980	4000	50,000	180°	80+	44	0.98	225	205	10
L3508-183R	YG-YGCL-18X-ETL(5000K)	ILLX SLMP 8"R 18W 5K 1980L WH	18	120 V	1980	5000	50,000	180°	80+	44	0.98	225	205	10

Also available in 16W (3000K, 4000K, 5000L) Nickle Trim Non-Energy Star.

Distributed by



Toronto | Calgary | Halifax

Tel: 1-905-264-1125 Toll Free: 1-800-361-7820 Fax: 1-905-264-1175
 Email: information@interadwes.com | Website: www.interadwes.com
 Head Office: 1-180 New Huntington Road, Vaughan, ON L4H 0P5

NOTE: Preliminary specifications. Subject to change without notice.