

# ILLUMINEX

## 8" Slim Panel Downlight

# Simply Bright!



### FEATURES

**8" 18W 1980lm**

**Type IC rated** (direct contact with insulation)

**Energy Star, cETLus listed**

- Dimmable
- 50,000 hour life
- 18W replaces 165W halogen
- Air-tight aluminum housing with PMMA lampshade in white finish
- Glare-free polycarbonate diffused lens
- Suitable for damp locations
- Quick & easy installation
- No flicker, mercury free, instant on
- 5-year warranty

### APPLICATION

- Offices
- Retail
- Museum
- Hospitality
- Commercial
- Lighting showroom



### INSTALLATION

- Recessed
- Insulated/drop ceilings
- Fits under studs and in narrow plenums

### ADDITIONAL INFO

- White/Nickle Trim Avail.
- Operating Temperature -25°C ~+40°C

### DIAGRAM

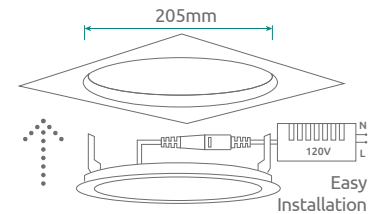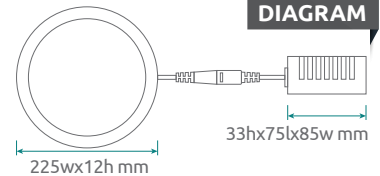

ORDER CODE	ENERGY STAR LISTING CODE	DESCRIPTION	WATTS	VOLT	LUMENS	CCT(K)	LIFE HRS	BEAM ANGLE	CRI	IP	PF	MOL (MM)	MOUNT SIZE	CASE QTY.
L3508-181R	YG-YGCL-18X-ETL(3000K)	ILLX SLMP 8"R 18W 3K 1980L WH	18	120 V	1980	3000	50,000	180°	80+	44	0.98	225	205	10
L3508-182R	YG-YGCL-18X-ETL(4000K)	ILLX SLMP 8"R 18W 4K 1980L WH	18	120 V	1980	4000	50,000	180°	80+	44	0.98	225	205	10
L3508-183R	YG-YGCL-18X-ETL(5000K)	ILLX SLMP 8"R 18W 5K 1980L WH	18	120 V	1980	5000	50,000	180°	80+	44	0.98	225	205	10

Also available in 16W (3000K, 4000K, 5000K) Nickle Trim Non-Energy Star.

Distributed by



Toronto | Calgary | Halifax

Tel: 1-905-264-1125 Toll Free: 1-800-361-7820 Fax: 1-905-264-1175  
 Email: [information@interadwes.com](mailto:information@interadwes.com) | Website: [www.interadwes.com](http://www.interadwes.com)  
 Head Office: 1-180 New Huntington Road, Vaughan, ON L4H 0P5